坚守品质 追求卓越

Adhere to Quality and Pursue Excellence



华尊·日佳

HuaZun · RiJia

RJW系列

RJW SERIES

喷水织机

WATER JET LOOM

青岛华尊机械股份有限公司

QINGDAO HUAZUN MACHINE CO.,LTD.

www.qdhuazun.cn

公司地址：中国青岛胶州艾山工业园

Jiaozhou Aishan Industry Park of Qingdao

电话TEL：+86-532-8622 2278

传真FAX：+86-532-8622 2279

网址Web：http://www.qdhuazun.cn

E-mail：sale@qdhuazun.com

wangyong@qdhuazun.com

邮编P.C.：266425

销售总部

地址：江苏苏州吴江盛泽湖东会馆41幢106商铺

NO.106.41 building Hudong Hall,shengze,wujiang,

suzhou,jiangsu

电话TEL：+86-512-6352 0135

电话TEL：+86-512-6311 2157

传真FAX：+86-512-6352 0135

E-mail：lan137062@126.com

青岛华尊机械股份有限公司

QINGDAO HUAZUN MACHINE CO.,LTD.

2026.11



公司简介 Company Profile

風雨共舟　携手共赢

青岛华尊机械股份有限公司成立于2000年，是一家专业从事喷水织机、喷气织机研发设计、生产销售的国家高新技术企业。

公司建立了完善的质量管理体系，先后获得了ISO9001、ISO14001、ISO45001等质量体系认证；拥有先进的加工中心、三座标测量仪、轴承加热装配设备、喷涂设备、总装流水线等，技术实力雄厚加工能力强；研发力量强，研发投入高，已累计取得了数十项专利技术，使公司拥有了核心技术；优秀的销售服务团队，为用户提供技术支持，为用户解除后顾之忧。

公司成立伊始，就将“做一件产品，树一座丰碑”作为经营理念，秉承“诚信、和谐、创新”的企业精神，坚守品质，追求卓越，在激烈的竞争中取得了年产销数千台织机的成绩，不但在国内拥有大量的客户，而且远销印尼、印度、越南、朝鲜、土耳其、埃塞俄比亚、巴基斯坦等国家，深受用户的喜爱。

不诋毁对手，不贬低同行，不辜负客户，专注于提高技术质量水平，用优质的产品全面的服务让客户满意，让同行认可，让对手敬佩。

华尊日佳，永握合作伙伴的双手，让诚信为先，共同发展共结双赢联盟。

Qingdao Huazun Machinery Co., Ltd. was founded in 2000. It is a national high-tech enterprise specializing in the R&D, design, production and sales of water-jet and air-jet looms.

The company has established a sound quality management system and obtained certifications including ISO9001, ISO14001 and ISO45001. We are equipped with advanced machining centers, three-coordinate measuring machines, bearing heating assembly equipment, spraying equipment, general assembly lines and other facilities. Backed by strong technical strength and manufacturing capacity, we maintain heavy investment in R&D and have obtained dozens of patented technologies, forming our core competitiveness. Our professional sales and service team provides timely technical support to customers and removes worries for them.

Since the very beginning, the company has adopted the business philosophy: “Make every product, build an everlasting monument”. Guided by the enterprise spirit of “Integrity, Harmony and Innovation”, we stick to quality and pursue excellence. In the fierce market competition, we achieve an annual output and sales volume of thousands of looms. We have a large customer base domestically, and our products are exported to Indonesia, India, Vietnam, the DPRK, Turkey, Ethiopia, Pakistan and other countries, enjoying wide recognition among users.

We do not slander competitors, belittle peers or fail our customers. We focus on upgrading our technology and quality. We strive to satisfy customers with premium products and comprehensive services, earning recognition from peers and respect from competitors.

Huazun (Rijia) always joins hands with our partners. With integrity as our priority, we work together for common development and a win-win partnership.

历程 Course

2000年1月，第一批RJW851型重磅喷水织机下线；
2000年4月，第一台双泵双喷重磅喷水织布机面市；
2000年6月，双泵三喷重磅水织机成功推向市场；
2000年10月，自主研发的FA201B、FA219A、FA239A系列梳棉机顺利通过鉴定，并投放市场；
2002年4月，3.6米超宽幅喷水织布机诞生；
2006年6月，喷水提花机远销南亚；
2008年5月，408系列喷水织机研制成功；
2008年8月，超宽双经轴系列水织机投放市场热销；
2009年2月，双泵四喷嘴系列喷水织机投放市场热销；
2012年4月，大卷装系列喷水织机诞生；
2015年3月，喷水织机大提花系列投放市场；
2015年9月，411系列喷水织机热销；
2015年12月，8100系列试制成功；
2016年11月，508机型震撼上市，好评如潮；
2017年2月，8100机型360筘幅充绒布机器调试成功；
2018年11月，5.6米超宽幅织机隆重推出；
2019年3月，智能化喷水织机隆重推出；
2019年2月，节能永磁直驱喷水织机批量上市；
2020年5月，玻纤专用喷水织机试验成功；
2021年7月，RJW8122机型推向市场，针对高密超细织造优势独特；
2022年4月，HZ860新型六连杆高速宽幅喷气织机推向市场；
2023年5月，第一代智能调节电动水泵织机推向市场；
2024年11月，针对国际市场，6600型高速喷水织机重装上市；
2025年10月，为解决超细产品织造问题，推出RJW-CXD8210机器，广受客户好评；
2026年3月，推出RJW8848型共轭凸轮打纬喷水织机；
2026年7月，RJW-CXD788超细旦专用喷水织机研发成功……

In January 2000, the first batch of RJW851 heavy weight water-jet looms came out of the assembly line;
In April 2000, the first double-pump double-nozzle water jet loom was on the market;
In June 2000, the double-pump three-nozzle heavy water-jet looms were successfully brought into market;
In October 2000, the independent research and development of FA201B,FA219A andFA239A series of carding machine successfully passed the indentification and put on the market;
In April 2002, 3.6 meters ultra-wide looms water jet looms were born;
In June 2006, water jet jacquard looms were exported to South Asia;
In May 2008, the 408 series water jet looms were successfully developed;
In August 2008, super-wide double beam series water jet looms got hot selling in the market;
In February 2009, double-pump,four-nozzle series water jet looms got hot selling in the market;
In April 2012, the batching-motion series water jet loom were born;
In March 2015, water jet loom jacquard series were put on the market;
In September 2015, the 411 series water jet looms got hot selling;
In December 2015, the 8100 series water jet looms trial production success;
In November 2016, the 508 model shocked the market and received high praise;
In February 2017, 8100-360 width double-layer lint fabric machine was successfully debugged;
In November 2018, the 5.6-meter ultra wide machine was launched;
In March 2019, intellertual water jet loom was launched;
In February 2019, energy-saving permanent magnet direct drive water jet looms were launched in bulk;
In May 2020, the test of fiberglass specialized water jet loom was successful;
In July 2021, the RJW8122 model was launched on the market, with unique advantages in high-density and ultra-fine weaving;
In April 2022, the HZ860 new six link high-speed wide width air jet loom was launched on the market;
In May 2023, the first generation intelligent regulation electric water pump loom was launched on the market
November 2024: The Model 6600 high-speed water-jet loom was officially launched for the global market.
October 2025: To address the weaving issues of ultra-fine products, the RJW-CXD8210 machine has been introduced and has received positive feedback from customers.
March 2026: The RJW8848 water-jet loom with conjugate cam beat-up mechanism was introduced.
In July 2026, the CXD778 special water-jet loom for ultra-fine denier was successfully developed.....

为客户制造独特价值
是我们一成不变的追求

QINGDAO HUAZUN MACHINERY CO.,LTD.

创新

专注于一个产品，不断创新，不断超越。创新已成为青岛华尊机械股份有限公司的信仰，已成为青岛华尊机械股份有限公司的追求。

青岛华尊机械股份有限公司成立以来，将技术创新作为公司最重要的一项工作，经过技术人员多年的努力，公司已获得50多项国家专利；4项计算机软件著作权登记。

INNOVATION

We focus on our core product, continuously innovating and striving for breakthroughs. Innovation stands as both the belief and pursuit of Qingdao Huazun Machinery Co., Ltd.

Since its founding, Qingdao Huazun Machinery Co., Ltd. has taken technological innovation as a top priority. Thanks to years of efforts by our technical team, the company has obtained over 50 national patents and 4 computer software copyright registrations.



质检车间
Quality Inspection Workshop



公司采用先进的检验检测设备，确保工序生产产品合格率，严格控制质量，从而保证整机的产品质量，通过检验改进产品生产工艺，提高质量，提升产品综合竞争力。

The company adopts advanced inspection and testing equipment to ensure the pass rate of products produced in the process and strictly control the quality, so as to ensure the product quality of the whole machine, improve the production process through inspection, improve the quality and enhance the comprehensive competitiveness of products.

CNC加工中心
CNC machining center



采用CNC加工中心成套加工关键零部件，使产品一次精加工完成，高精度的进口加工中心，成套加工左右墙扳，确保设备两侧齿轮同轴旋转，降低产品运转时产生的震动和噪音，提高织机稳定性及开机率。

CNC Machining Center is used to process key parts in a complete set, so that the product can be finished in one finishing process, high precision import processing center, complete processing of left and right wall wrenches, ensuring coaxial rotation of gear on both sides of the equipment, reducing vibration and noise generated during product operation, and improving loom stability and start-up rate.

检测设备
CNC machining center



公司配备了三座标测量仪、盐雾试验机、光学图像尺寸测量仪、智能气动量仪、洛式硬度仪等先进的测量仪器，为高品质制造提供保障。

The company is equipped with advanced measuring instruments such as three-coordinate measuring machines, salt spray testers, optical image dimension measuring instruments, intelligent pneumatic measuring instruments, and Rockwell hardness testers, providing guarantees for high-quality manufacturing.

流水线组装
Assembly line



公司采用织机整机装配流水线，通过严格的质量管理、精细分化组装工序流程。用专用工具定扭矩紧固联结件，通过整条流水线上的技术来优化产品的质置控制，对生产设施的可靠性、成本效益和质量具有严格的要求，确保了整机组装的质量100%合格。

The company uses the Whole machine assembly line. through the strict quality managemant. fine dilferentiation assembly process flow. The factory people use the special tool to tighten the connecting parts with constant torgue.optimizing product's quality control through whole assembly line's technic. we have the strict requirements about production facility's stabiliy, cost efficiency and quality to ensure whole machine's assembly qualified by100%.

RJW8848系列喷水织机
RJW8848WATER JET LOOM



华尊公司 日佳机械
TEL:0512-63520135 RIJIA MACHINERY

主要特点
Main features

首款采用共轭打纬机构的喷水织机，彻底消除四连杆和六连杆打纬运动的弊端与不足。

1、极小动程，230cm及以下筘幅，打纬动程62mm，大幅减少钢筘与经纱的摩擦，适应超细高密织造；

2、第一片综框位置前移，使经纱开口更加清晰，利于高速织造；

3、特殊设计的打纬运动曲线，高达120度的静止角度，引纬空间更加充裕；

4、引纬运动中，钢筘静止，减少钢筘筘对水线的扰动，水线集束性高，纱线飞行稳定，引纬精确。

This is the first water jet loom adopting conjugate cam beating-up mechanism, which completely eliminates the drawbacks and deficiencies of four-bar linkage and six-bar linkage beating-up motions.

1. Ultra-short stroke: For reed width of 230 cm and below, the beating-up stroke is 62 mm. It greatly reduces friction between the reed and warp yarns, suitable for weaving ultra-fine and high-density fabrics.

2. The first heald frame is moved forward to obtain clearer warp shed, facilitating high-speed weaving.

3. Specially designed beating-up motion curve with a dwell angle up to 120° , providing more sufficient space for weft insertion.

4. The reed keeps stationary during weft insertion, lowering disturbance of the reed to the water jet. The water jet maintains good cohesion, ensuring stable yarn flight and accurate weft insertion.

RJW-CXD8210系列喷水织机
RJW-CXD8210WATER JET LOOM

主要特点
Main features

通过三十余项改进设计，推出适应针对10D及以下超细旦织物织造的RJW-CXD8210机型

1、全新小动程的六连杆打纬机构。增加引纬空间，优化打纬运动曲线，使打纬与引纬动作配合更精确，同时减小整机振动；

2、针对超细旦纬纱特性，优化引纬相关零部件，采用全新设计参数，保证水线与纱线飞行状态处于稳定状态；

3、优化开口机构，进一步缩小第一片综框与织口间的距离，减小开口量，同时提升开口清晰度；

4、优化废边纱端处理机构，消除弃边端纬纱造成的布边档；

5、改进送经机构，兼容并适应600mm边盘织造；

With more than 30 improved designs, the RJW-CXD8210 is developed for weaving ultra-fine denier fabrics of 10D and below.

1. Brand-new short-stroke six-link beat-up mechanism. It increases weft insertion space and optimizes the beat-up motion curve for more precise coordination between beat-up and weft-insertion movements, while lowering overall machine vibration.

2. In view of the properties of ultra-fine denier weft yarns, we optimized weft-insertion-related components and adopted newly-designed parameters to keep the water jet and yarn flight stable.

3. Optimized shedding mechanism: further reduces the distance between the first heald frame and the cloth fell, lowers the shedding stroke, and improves shedding clarity.

4. Optimized selvedge waste yarn processing mechanism to eliminate selvedge marks caused by waste weft yarn ends.

5. Improved let-off mechanism, compatible with weaving using 600-mm flanged beams.



华尊公司 日佳机械
TEL:0512-63520135 RIJIA MACHINERY

RJW8122系列喷水织机
RJW8122WATER JET LOOM

主要特点
Main features

RJW8122系列喷水织机，是针对超高密及重磅织物的织造而设计生产的一款织机，对整机的刚性进行优化升级，抑制织造过程中的振动，提升高速织造的稳定性。采用新型独立废边纱开口机构（已获国家发明专利），适应高速运行，并提升可靠性。采用高强度的耐磨不锈钢打纬轴，降低维护成本，并保证高强度打纬工况的超长使用寿命。

The RJW8122 series water jet loom is designed and produced for weaving ultra-high density and heavy-duty fabrics. It optimizes and upgrades the rigidity of the entire machine, suppresses vibration during the weaving process, and enhances the stability of high-speed weaving. Adopting a new independent waste edge yarn opening mechanism (obtain a national invention patent), adapting to high-speed operation and improving reliability. The use of high-strength wear-resistant stainless steel weft knitting shaft reduces maintenance costs and ensures an ultra long service life under high-strength weft knitting conditions.

◆短动程六连杆打纬机构
◆Short stroke six link beat-up mechanism
◆可选双泵多色选纬
◆Optional dual pump multi-color weft selection
◆整机刚性优化升级设计，应对高密重磅织造
◆Rigid optimization and upgrading design of the entire machine to cope with high-density and heavy-duty weaving
◆采用新型独立废边纱开口机构，提高捕纬稳定性
◆Adopting a new independent waste edge yarn opening mechanism to improve the stability of weft picking
◆可选积极松经机构，适应特殊品种织造
◆Optional active warp release mechanism, suitable for special variety weaving



RJW8100系列喷水织机
RJW8100 WATER JET LOOM

1. 采用短动程打纬，适应高速织造的同时减少钢筘对织物的损伤;
2. 缩短织物从织口到卷取刺皮辊的布的长度，减少回弹，有利于提高织口的稳定性;
3. 一体式墙板，机架增加纵向撑挡，提高机架稳定性;
4. 采用偏心摇轴结构，减小打纬振动
5. 1-4色曲柄开口或曲柄6连杆配置;
6. 稳定的后梁涨力结构消极松经;
7. 经位置线高度降低40mm，既降低了织机重心，提高了稳定性，又便于挡车操作;

1. use short stroke to beat the weft, adapt to high-speed weaving, and reduce the damage of reed to fabric
2. from the mouth to shorten the fabric take-up roller thorn cloth length, reduce the springback, improve the stability of the textile export;
3. Integrated wall panel,rack increase longitudinal support, improve rack stability;
4. eccentric shaft structure, reducing vibration beating
5. 1-4 color crank opening or crank 6 linkage configuration;
6. stable beam tension structure of negative slack;
7. line of position to reduce the height of 40mm, which not only reduces the loom focus, improve the stability and easy operation;



高生产性

始终视高速性能为喷水织机的基本使命。“RJW8100”通过强韧的机架构造、一体式墙板设计，更加稳定的引纬性能、合理的开口和打纬机构等，发挥出超越原有织机高速性能。

高品位

通过强韧的机架构造、强化的送经、缩短织前布经路，大幅提升了打纬的性能，实现了高密制造。

良好的操作性

“RJW8100”是以操作简便为目标开发的。降低经线高度，使操作更简便。

提升通用性

通过缩短织前布经路，使更高密度的稳定织造成为了可能。从细支纱到粗支纱，从窄幅到宽幅，以至不平衡组织的织物，用以期待能对应更广泛的织造产品。

通过缩短喷嘴间距，第一喷嘴和第二喷嘴的引纬状态差异也是很小的，即使织机高速运转，也能实现均一化的引纬。

HIGH PRODUCTIVE

Always regard high speed performance as the basic mission of water jet looms. The "RJW8100" takes advantage of the strong frame structure, Integrated wall panel design,the more stable weft insertion performance, the reasonable opening and beating up mechanism, and so on.

HIGH GRADE

Through the strong frame structure, the strengthening of the let-off and shorten the weaving cloth road before the weaving, greatly enhance the beating up performance, High density manufacturing.

GOOD OPERABILITY

"RJW8100" is developed with the goal of simple operation. It reduces the position line and improves the operation simplicity.

ENHANCE VERSATILITY

It is possible to stabilize weaving by shortening the weaving path. Fabrics from thin to coarse yarn, from narrow to wide, and even unbalanced fabric, are expected to correspond to a wider range of woven products.

By shortening the nozzle spacing, the difference of the weft insertion state between the first nozzle and the second nozzle is also very small. Even if the loom runs at high speed, uniform weft insertion can be achieved.

高效 创新 卓越
Efficiency Innovation Excellece

幅宽最高可达5.6米，用作灯箱布等广告布制作。

THE WIDTH CAN REACH UP TO 5.6 METERS, AND IS USED FOR MAKING ADVERTISING CLOTH SUCH AS LIGHT BOX CLOTH.

RJW-CXD788系列喷水织机
RJW-CXD788WATER JET LOOM

主要特点
Main features

1.全新织口结构设计，精准优化打纬角参数，强化有效打纬力输出，平衡打纬全程织口两侧的张力差，抑制不平衡组织工况下的织口抖动。

2.实现600盘片与800盘片的无缝兼容。针对性缩短了后梁到综框的传动距离，进一步优化经纱张力均匀性，减少经纱摩擦损伤，提升织物质量。

3.重新校准综框排布坐标，缩短首片综框到钢筘的关键间距。实现开口层级分明清晰，从根源上解决了细旦高密、无捻向纱品种织造时的经纱粘并、非正常断纬难题，为稳定高速运行扫清了结构障碍。

4.硬铬三角撑板，能完美适配全消光纱线的特殊织造工况，能抵御粗糙纱线的持续研磨，从根源上杜绝锈迹污染纱线、三角撑板刮蹭织物导致的布面擦伤等问题。

华尊公司 日佳机械
TEL:0512-63520135 RIJIA MACHINERY

1. Adopts a new weaving shed structural design, precisely optimizes the beating-up angle parameters, enhances the effective beating force output, balances the tension difference on both sides of the weaving shed throughout the beating-up process, and suppresses weaving shed vibration under unbalanced weave conditions.

2. Supports seamless compatibility between 600 discs and 800 discs. It specifically shortens the transmission distance from the back rest to the heald frames, further optimizes the uniformity of warp tension, reduces frictional damage to warp yarns and improves fabric quality.

3. Recalibrates the layout coordinates of heald frames and shortens the critical distance from the first heald frame to the reed. It delivers distinct and clear shedding levels, fundamentally solving the problems of warp yarn sticking & merging and abnormal weft breakage when weaving fine-denier high-density and non-twist yarn varieties, removing structural obstacles for stable high-speed operation.

4. Hard chrome triangular support plate is perfectly adapted to the special weaving conditions of full-dull yarns. It can withstand continuous abrasion from coarse yarns, fundamentally eliminating issues such as yarn contamination by rust stains and fabric surface scratches caused by the triangular support plate scraping against fabrics.



RJW718系列喷水织机
RJW718 WATER JET LOOM

RJW718系列喷水织机，是为提高织造产品适应性，减少投资成本而研发的一款优质喷水织机，其织造范围可从一般面料到厚重高附加值织物，一台机器可满足多种需求。

RJW718 series is high quality water jet loom developed for adaptability of fabric and reducing producing cost, which ranges from common fabric to heavy high value-added one.

高速化
High-speed

我公司专项研发的强韧机架结构，使机器运转稳定，可以减轻高速运转时的机器震动，从而实现更加稳定的机器运转，提高织物品质。

Our research of strong frame structure, makes stable running machine and reduces vibration when high speed.

专业　品质　超越

Specialty　Quality　Transcend

适应性
Adaptability

偏心打纬，可以极大的提高打纬力。不同幅宽，可适当调整偏心数量，保证打纬的可靠性。较高的打纬力，能够更好的织造较高纬密织物。

Eccentric beating, greatly improves beating force. Different width, we can adjust eccentric number. High beating force, focuses on high weft-density fabric.

经济型
Economic

标配电主轴电机，可实现较普通电机省电至少8%-25%。更快的速度，更高的效率，可以稳定的提高产量；更好的适应性，高张力，高纬密都能轻松驾驭；更稳定的机架，极大减小零件的磨损。

Standard specification is Motor X, saving 8%-25% power than common one. Higher speed, higher efficiency, stably improves producing output;Better adaptability that is high tension,high weft density all can do. More stable frame, reduces abrasion of small parts.



RJW508系列喷水织机
RJW508 WATER JET LOOM

◆可选择:机械送经、机械卷取,电子送经、电子卷取
◆可选择:1-6喷电子自由选纬
◆可配置:曲柄开口、凸轮开口、多臂开口和提花装置。
◆可选择幅宽:135,150,170,190,210,230,260,280,300,320,340,360CM
◆纬密范围:4-100根/cm(根据实际经纬纱规格和织物组织确定)
◆设计最高转速:1100转/分钟(根据实际经纬纱规格和织物组织确定)
◆综框片数:曲柄开口2-8片,凸轮开口2-14片,多臂开口16片。
◆装机功率:1.5kw-5.4kw

◆ Optional: mechanical let-off, mechanical take up, electronic let-off, electronic take up
◆ Optional: 1-6 nozzle electric weft selecting freely.
◆ Configurable shedding devices: crank shedding; cam shedding;dobby shedding;jacquard
◆ Optional reed width:135,150,179.190,210,230,260,280,300,320,340,360CM
◆ The weft density range: 4-100 pick/cm (identified according to actual weft yarn specifications and fabric weave)
◆ Maximum speed: 1100RPM (identified according to actual weft yarn specifications and fabric weave)
◆ Heald frame number: crank shedding 2-8 pieces; cam shedding 2-14 pieces; dobby shedding 16 pieces
◆ Install power: 1. 5kw-5. 4kw

高纬密 高速度 高效率

High density High velocity High efficiency



强韧的机架结构:高刚性两侧箱型机架,可以减轻高速运转时的振动,可以实现进一步稳定的引纬和打纬,从而保证织物的高品位。主要的驱动部分安排在油浴的环境中,所以实现了进一步稳定的高速运转。

高速中从容引纬;通过打纬曲线的改进,加大了纬丝飞行角度,使引纬更加稳定,可以织造出高品质的差别化织物。

稳定的运转:强韧的机架结构和高刚性的送经、卷取机构,使织机运行更加稳定,织造范围从轻薄到中厚织物,从低密度到高密度织物,即使织造复杂组织的织物和开口不平衡织物时,振动也很轻微,能够稳定的织造。

设计了最优化的四连杆打纬结构,运动流畅振动极小,适合织布要求,可使结构经久耐用。

采用了更合理的柱塞、泵簧、喷嘴、柱式单向阀,使引纬更加柔和、更加稳定。改进了引纬结构,使水泵的使用寿命更长。

设计了更高追随性的张力系统,减少了客户对织物隐档的担忧。减少了脆弱。

经纱的断经,使开口更清、布面质量更高。经轴稳定器使高张力、高纬密织物的织造更稳定。

设计了更坚固的织口支撑结构和更抗拉、更抗布打滑的卷取罗拉结构。稳定的织口既减少了各种布面档子的产生又使高张力高纬密织物更容易织造。

Robust frame structure;Detached sturdy double-sided box frame which reduces vibration at high-speed operation. Because of this reduces vibration, the weft insertion and beating motion are much more stabilized which keeps fabric quatity higlh.Its main drive is contained in an oil bath to achieve stable high-speed operation

Weft insertion methodically at high speed: the weft insertion angle is enlarged by improvement in the beating curve that ensure weft insertion stably for all kinds of chemical fiber materials, as well as the great improvement of unstable situation of shedding and warp yarn tension, ensure weaving the differentiation fabric with high quality

Stable running: the robust frame structure, rigid let off and take up stabilize the loom running and the weaving range is increased from thin to middle-thick fabric, and from low to high density fabric. Even weave fabrics of complicated or unbalanced construction, vibration is low

The optimized Four-bar Beating-up structure on the frame of 408 wallboard machine is designed. The beating-up structure not only moves smoothly, but also vibrates minimally. It is most suitable for weaving and can make the structure durable.

RJW408 uses a more reasonable plunger, pump spring, nozzle, valve sheet,so that weft more soft, more stable.improved weft structure, so that the pump life longer, no wear.

RJW408 designed a higher follow-up tension system, Reduced customer concerns about marks.Reduce the breakage of fragile warp yarns、The openings are clearer、The fabric is of higher quality.The warp beam stabilizer makes the weaving of high tension, high latitude weave fabric more stable.

RJW408 designed a more robust fabric support structure and a take-up roller structure that is more tensile and more resistant to fabric slippage.The stable warp opening not only reduces the marks of various fabric and makes high-tension high-weft fabric easier to weave.



技术参数 Specifications


筘幅（cm)reed Space		150,170,190,210,230,260,280,320,340,360, 420,480,560(cm)
有效幅宽 (cm) Useful reed space		最大穿筘门幅=筘幅，最小幅宽穿筘门幅=筘幅-60cm Maximum reed width = reed width, minimum width reed, door width = reed -60cm
构造 Frame		两侧箱体式（主要传动部分采用油浴润滑）+中间横梁式构造 Both sides of the box (the main transmission part of oil bath lubrication) + intermediate beam structure
传动部分 Driving	刹车 brake	机电一体，电磁离合器控制机械式刹车 Direct stop mechanism by an electromagnetic brake
	控制 control	按钮式和触摸式，（开关键，准备键，正转键，逆转键，停止键） Push and touch button(Arrange,run,stop,forward inching
	主电机 motor	带超启动功能可连续运转电机/永磁直驱电机 Rush start motor/Permanet magnet direct drive motor
	电机功率 Motor capacity	1.5kw 1.8kw 2.2kw 2.7kw 3.2kw 3.7kw 4.5kw 5.0kw 5.2kw 7.2kw 7.5kw
打纬机构 beating		曲柄摇杆机构 Crank rocker mechanism
送经机构 Let-off	构造 system	全自动机械式连续送经或电子式连续送经。单经轴或垂直式双经轴 Automatic mechanical and continuous let-off, or electronic let-off. One or vertical two roll
	经轴直径 warp beam	Φ600mm法兰盘 Φ800mm法兰盘 Φ 914mm法兰盘 Φ1000mm法兰盘 Φ600mmFlange Φ800mmFlange Φ 914mmFlange Φ1000mmFlange
卷取机构 Take-up	构造 system	机械式连续卷取或电子式连续卷取。 Mechanical or electronic continuous take-up
	适用纬密 pick density	常规：5-60根/cm，特定：3-128根/cm. Normal:5-60picks/cm, special:3-128picks/cm
	布匹卷取直径 cloth width updiameter	Φ 520mm， 机外卷600mm 大卷装(选配) 最大达800mm Φ 520mm， Outer coil 600mm package (optional) Maximum 800mm
开口机构 Shedding	平织 Plain shedding	曲柄开口（2-8片),平纹组织。 Crank shedding(heald frame number: 2 to 8) 1/1 fabric
	凸轮 cam shedding	凸轮开口（2-14片），平纹、斜纹，缎纹组织。 Cam shedding (heald frame number:2-10),plain, twill, satin fabric
	多臂 dobby shedding	消、积极式（最多综框数：20片），电子或机械式读取机构 Positive/negative heald frame number:20(max), electronic and mechanical reading system, plain, twill, satin or complex deaign
	提花 jacquard	1408针、2688针、5120针电子提花装置 1408 2688 5120 lifting hooks,electronic jacquard device

※ 规格尺寸如有变化，恕不另行通知
Any changes in specifications or dimensions will be communicated separately and notified accordingly

技术参数 Specifications (续)


引纬机构 weft insertion	测长机构 Measuring &storage	300型RDP风机式机械测长（单喷）或电子储纬式测长（1-6喷） 300RDP type mechanical measuring turbo blower (single nozzle) or electronic weft feeder (1-6 nozzles)
	泵体 Pump	MS型,MH型，单泵或双泵结构 Type MS, MH, single pump or double pump structure
	水泵柱塞 Plunger Of Pump	Φ32/Φ18，Φ36/Φ20，Φ36/Φ22，Φ36/Φ24，Φ36/Φ26，Φ39/Φ28，Φ39/Φ30，Φ42/Φ32， 陶瓷柱塞 ceramic plunger 专用定制 Specially customized
	喷嘴 Nozzle Needle	T17/00,T20/10,T30/10,T45/20,TL50-00,TL65-20,TL75-40,T75-40,TL90-40
	纬入选择 Weft Filling	1个喷嘴，2个喷嘴，3个喷嘴，4个喷嘴，6个喷嘴 One, two, three, four nozzle, six nozzle
	探纬 Filling Feeler	光电式探纬器，光纤式，细旦专用 Photoelectric weft feeler,Fiber type,Fine derier dedicated
耳丝部分 selvage		行星齿轮式绞边装量 Planetary gear hemming
电气部分 electrical part	国产或进口 Domestic or imported	主控板，交流接触器，变压器，变频器，数控接口，耳丝断自停装置，废丝断自停装置，过载过热保护 Main control board, AC contactor, transformer, Frequency converter, NC interface, selvage break system, waste yarn break system, overheating and overload protection
	电子码表 Electronic meter	织机转速，总产量，分班产量，总效率，分班效率，定布长度自动控制，停机原因汇总并显示。 Count and display:rotational speed,total yield,team yield, total efficiency,team efficiency,cloth length auto control,stopping.
随机配件 Other devices	废丝桶1个，喷针喷体配套 a trashcan, Needle & Nozzle assembly	

RJW-CXD788、RJW718、RJW508系列喷水织机机械尺寸图

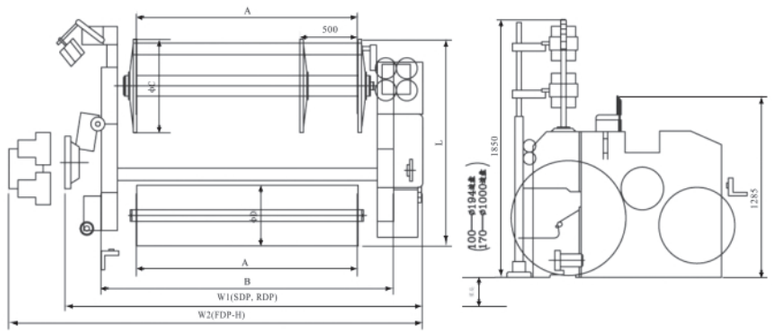

筘幅	A	B	W1		W2	
			1C(SDP.RDP)		2C(FDP-H)	
			曲柄	多臂	曲柄	多臂
150cm	150	2070	2750	2775	3250	3275
170cm	170	2270	2950	2975	3450	3475
190cm	190	2470	3150	3175	3650	3675
210cm	210	2670	3350	3375	3850	3875
230cm	230	2870	3550	3575	4050	4075
280cm	280	3370	4050	4075	4550	4575
320cm	320	3770	4450	4475	4950	4975
340cm	340	3970	4650	4675	5150	5175
360cm	360	4170	4850	4875	5350	5375

RJW-CXD8210、RJW8848、RJW8122、RJW8100系列喷水织机机械尺寸图

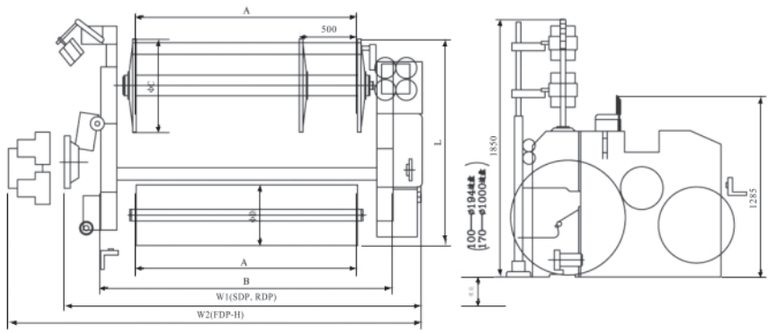

筘幅	A	B	W1		W2	
			1C(SDP.RDP)		2C(FDP-H)	
			曲柄	多臂	曲柄	多臂
150cm	150	2070	2750	2775	3250	3275
170cm	170	2270	2950	2975	3450	3475
190cm	190	2470	3150	3175	3650	3675
210cm	210	2670	3350	3375	3850	3875
230cm	230	2870	3550	3575	4050	4075
280cm	280	3370	4050	4075	4550	4575
320cm	320	3770	4450	4475	4950	4975
340cm	340	3970	4650	4675	5150	5175
360cm	360	4170	4850	4875	5350	5375



